

LUDLUM MEASUREMENTS, INC.

Model 9DP-1 Ion Chamber Survey Meter

FEATURES

- Special Design for Measuring Pulsed Fields
- Low Pressure Chamber is Non Hazmat
- 2 $\mu\text{Sv/h}$ to 500 mSv/h (200 $\mu\text{R/hr}$ to 50 R/hr) Range
- Sunlight Readable Color Display
- Auto Zeroing & Ranging
- Rechargeable Batteries
- Alarming Capability
- Rate, Integrate & Peak Hold Readouts
- Data Logging
- USB Connectivity
- Free Firmware Updates through Internet

INTRODUCTION

The Ludlum Model 9DP-1 ion chamber meter is specially designed for radiography work where pulsed fields are being measured. This instrument correctly integrates 50 nanosecond pulses (and wider) that other systems typically miss or measure inaccurately. This instrument measures both exposure and exposure rate and can simultaneously display the exposure rate, integrated value, and highest rate seen by the instrument. The integrated value can be reset (if desired) using one of the four convenient front-panel mounted buttons. The buttons also control instrument power, function selection, setting the speaker volume and acknowledging alarms.

The detector chamber is only pressurized to 2.5 atmospheres (22 psig), thus avoiding all (USA) HAZMAT concerns for shipping and handling. However, this reduced pressure also reduces sensitivity, so the minimum "good" measurement point is 2 $\mu\text{Sv/h}$ (200 $\mu\text{R/hr}$). The stunning 256-color, bit-mapped display provides an optimized presentation of the data and is accompanied with icons informing the user of the active functions and instrument status. Alarms are manifested using color changes on the display and an acknowledgeable audio output.

The instrument is powered using NiMH type rechargeable batteries that deliver up to 30 hours operation between charges. Measurements can be logged to an industry standard, USB thumb drive plugged into the instrument USB port. Data are written in csv format for convenient retrieval by a PC spreadsheet or database program.

The Model 9DP-1 is part of Ludlum's new Dimension series of meters employing state-of-the-art technologies that deliver tremendous capability, user friendliness, and convenient PC connectivity. The built-in USB port facilitates password-protected access to parameter settings via direct connection to a USB keyboard (with no additional USB ports, and no integrated mouse or trackpad) thus foregoing any need to install PC application software or dealing with operating system compatibility issues. Ludlum also offers an optional Dimension PC Windows™ interface program that enables total control over the instrument and performs calibration.



Model 9DP-1 control panel

Ludlum Measurements, Inc. P.O. Box 810, Sweetwater, Texas 79556

Web: ludlums.com Tel: 800-622-0828 / 325-235-5494 Fax: 325-235-4672 Email: sales@ludlums.com

Note: specifications subject to change without notification. We are not responsible for errors or omissions.

Jul 2021

PEO B.V.

info@gotopeo.com
www.gotopeo.com

The Netherlands

Havenweg 16, 6603 AS Wijchen
+31 (0)24 648 86 88

Belgium

Watermolenstraat 2, B-2910 Essen
+32 (0)3 309 32 09


CoC 34107894

VAT NL807859151B01


IBAN NL29 RABO 0356 1960 46

BIC RABONL2U



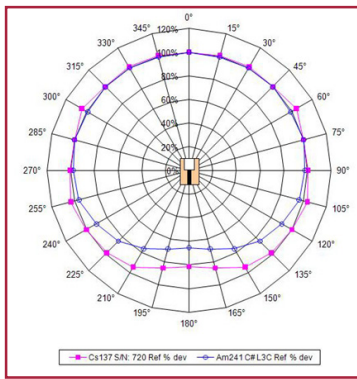

Angular Dependence

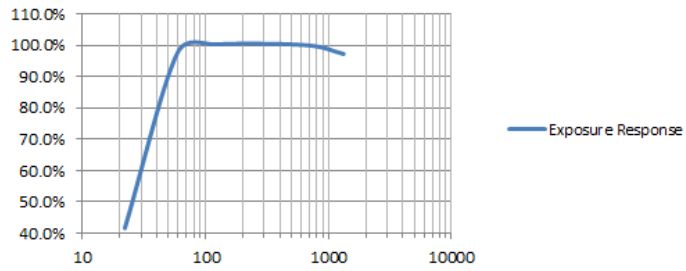Model 9DP-1 Exposure Energy Response Relative to Cs-137


Model 9DP-1 Exposure Energy Response

SPECIFICATIONS

Part Number: 48-4108

RADIATION DETECTED: gamma & X-rays above 25 keV; beta above 1 MeV, correctly integrates pulsed fields with 50 nanosecond pulse widths

OPERATING RANGES:

- Sv/h units: 2 – 50 μ Sv/h, 2 – 500 μ Sv/h, 0 – 5 mSv/h, 0 – 50 mSv/h, 0 – 500 mSv/h
- R/h units: 0.2 – 5 mR/h, 0.2 – 50 mR/h, 0 – 500 mR/h, 0 – 5 R/h, 0 – 50 R/h
- Gy/h units: 2 – 50 μ Gy/h, 2 – 500 μ Gy/h, 0 – 5 mGy/h, 0 – 50 mGy/h, 0 – 500 mGy/h

CHAMBER VOLUME: 220 cm³ (13.4 in³) volume pressurized to 2.5 atmospheres (22 psig)

ACCURACY: +/-10%

RESPONSE TIME: ranges from 5 seconds in lowest range to under 2 seconds in highest range when measuring from 10% to 90% of final value

MEASUREMENT READOUT: simultaneous display of rate and either integrated reading, highest rate (peak hold), or pulsed mode status

INCLUDED FUNCTIONS: *integrated reading, peak reading, range lock (0-50 R/h) for reading pulsed fields*
DATA LOGGING: Data is stored to detachable USB thumb drive in CSV format for easy retrieval by PC spreadsheet/database programs. Data points include real-time clock generated date and time with rate, integrated reading, and instrument status. Logging time intervals are set by PC interface program or standard USB keyboard (*with no additional USB ports, no integrated mouse, and no trackpad*)

LCD DISPLAY: 8.9 cm (3.5 in.) diagonal, 240 H x 320 W pixels, TFT active matrix, 262,144 colors, 220 cd/m², automatic backlighting

USER CONTROLS: 4 pushbuttons on instrument face for instrument on/off, enabling functions, adjusting audio output, acknowledging alarms or resetting function value

AUTOMATIC FUNCTIONS: auto ranging, auto zeroing, auto LCD backlighting

AUDIO OUTPUTS: built-in unimorph speaker, > 60 dB at 0.6 meters (2 ft.) An optional audio jack can be installed for connecting to an external headsets (headset is available as an option).

ALARMS: two levels of radiation alarms available, each is user programmable throughout entire readout range

TEMPERATURE RANGE: -20 to 40 °C (-4 to 104 °F)

POWER: eight rechargeable "AA" NiMH batteries, supplied with wall charger for direct connection to instrument

BATTERY LIFE: 12 to 30 hours between charges, depending upon use of backlighting

USB INTERFACE: single USB port, may be connected directly to a USB keyboard (see above) to facilitate password-protected parameter changes, accepts USB thumbdrive for storing logged data, optional interface kit facilitates connection to a PC for parameter editing and calibration

CONSTRUCTION: durable molded plastic with internal metal support

SIZE: 21.9 x 11.6 x 24.5 cm (8.6 x 4.6 x 9.6 in.) (H x W x L)

WEIGHT: 1.5 kg (3.3 lb), including batteries

Model 9DP-1 thumb drive


Also Available

- | | | | |
|---|--------------|-------------------------|--------------|
| • Model 9DP Ion Chamber Survey Meter | PN: 48-3742 | • Audio Jack Output | PN: 4293-891 |
| • Model 9DP* | PN: 48-3942 | • Alkaline Battery Pack | PN: 4543-028 |
| • Dimension Interface Package | PN: 4293-763 | • Carrying Case | PN: 2313065 |
| • Check Source, 10 μ Ci ¹³⁷ Cs | PN: 01-5231 | | |

Ludlum Measurements, Inc. P.O. Box 810, Sweetwater, Texas 79556

Web: ludlums.com **Tel:** 800-622-0828 / 325-235-5494 **Fax:** 325-235-4672 **Email:** sales@ludlums.com

Note: specifications subject to change without notification. We are not responsible for errors or omissions.

PEO B.V.

 info@gotopeo.com
 www.gotopeo.com

The Netherlands

 Havenweg 16, 6603 AS Wijchen
 +31 (0)24 648 86 88

Belgium

 Watermolenstraat 2, B-2910 Essen
 +32 (0)3 309 32 09

CoC 34107894

VAT NL807859151B01

IBAN NL29 RABO 0356 1960 46

BIC RABONL2U

